

Ori-Plast®

LIFE LINES... NOT JUST PIPE LINES

ISO 9001 : 2000 COMPANY

Registered Office
40, Strand Road, 3rd Floor
Room No.9
Kolkata - 700 001
Phone: +91-33-2243 3396/97
Fax: +91-33-2243 2395
Email: contactus@oriplast.com
customercare@oriplast.com

Delhi Branch Office
Unit No. 1402, R G Trade Tower
B7, Netaji Subhash Place
Wazirpur District Center
Pitampura, New Delhi - 110 034
Ph: +91-11-2735 2164/65
Tele Fax: +91-11-4370 2640
Email: northsales@oriplast.com

C & F Agent, Cuttack
M/s. Aditya Logistic
202/C, P.O.: Naya Bazar
P.S.: Chauhiaganj
Cuttack - 753 004, Odisha
Ph: +91-671-244 0419, 320 2318
Email: cuttackdepot@oriplast.com

Jaipur Branch Office
Plot No. K53, Flat No. G3
Kishan Nagar (Shyam Nagar)
Jaipur - 302 019 (Rajasthan)
Tele Fax: +91-141-229 7111
Email: sales@adventec.in

Balasure Works
O.T. Road, P.O. & Dist. - Balasure, Odisha - 756 001
Ph.: +91-6782-26 4551-53, Fax: +91-6782-26 2551, Email: works@oriplast.com

Corporate Office
9A, Wood Street,
Kolkata - 700 016
Phone: +91-33-2283 9054/58
Fax: +91-33-2283 9059
E-mail: corporate@oriplast.com
sales@oriplast.com

Hyderabad Branch Office
Flat No. 6A, 6th Floor, Amrutha Estate
Dhruvatar Apartment, somajiguda
Hyderabad - 500 082 (A.P.)
Ph: +91-40-6598 3033
Fax: +91-40-2337 5618
Email: hyderabad@oriplast.com

Bhubaneswar Branch Office
Plot No. 275
Hotel Mayfair Road
Ground Floor, Jaydev Vihar, P.O. RRL
Bhubaneswar - 751 013
Odisha
Tele Fax: +91-674-236 1336

Guwahati Branch Office
Suhagpur, Promothas Baruah Road
House no. 12, Rehabari,
Guwahati - 781008, Assam
Ph: 09864780080 / 9207080080
Email: sbhattacharjee@oriplast.com

Ori-Plast®

LIFE LINES... NOT JUST PIPE LINES



Toll Free No: 1800 123 2123

Toll Free No: 1800 123 2123
sales@oriplast.com, www.oriplast.com

Ori-Plast®




uPVC PIPES AND FITTINGS

Application

Ori-Plast uPVC push type pipes and fittings are used for all plumbing purposes in residential & commercial buildings. It is ideally suited for looping at each floor level, outdoor installations and concealed pipelines for cold water distribution. Ori-Plast plumbing system is available upto 4" in diameter in schd 40, 80 and 120 with fittings.

Product range

USAGE - Plumbing & Agriculture
JOINTING - Solvent Cement
STANDARD - ASTM D: 1785, IS 4985, ASTM D: 2467



uPVC Push Type Fittings (White & Blue)

Items (Sizes 1/2" to 2")

Union, Female Threaded Adapter (FTA), Male Threaded Adapter (MTA), Ball Valve, Long Bend, Elbow (45°), End Cap, Reducing Socket, Reducing Bush, Brass Inserted Tee, Pass Over Female.

Items (Sizes 1/2" to 4")

Coupler, Tee, Ball Valve (S S Handle), Reducing Elbow (Push and Threaded), Elbow, Reducing Tee, Tank, Connecting Nipple, Compact Ball Valve, Double Union Ball Valve, Check Valve, Butterfly Valve (Lever & Gear Type), Flanges.

For better understanding please refer to our price list.

Benefits / Advantages


- Leak proof joints.
- Light in weight, stronger, resilient, long lasting, maintenance free, corrosion free and mineral resistant.
- Hygienic for carrying potable water.
- No sediment deposition and hence no reduction in cross-sectional area even after use of several years.
- Protected from effects of UV rays.
- Availability of full range of fittings for all purposes.
- Self extinguishing.
- Absolute economy in material cost, transportation and installation.

uPVC Pipes (White & Blue): Length 6/5/3 Mtr


Sl. No.	Type	Pressure Rating (BAR)	Diameter
1	Schedule 40	20.5 to 4.5	1/2" to 12"
2	Schedule 80	29.0 to 7.6	1/2" to 12"
3	Schedule 120	35.0 to 11.0	1/2" to 12"

uPVC Pipes: Length 6/3 Mtr

Sl. No.	Class	Pressure Rating(MPa)	Diameter(mm)
1	1	0.25	90 to 630
2	2	0.40	63 to 630
3	3	0.60	50 to 630
4	4	0.80	25 to 630
5	5	1.00	20 to 630
6	6	1.25	20 to 630



Ori-Plast®

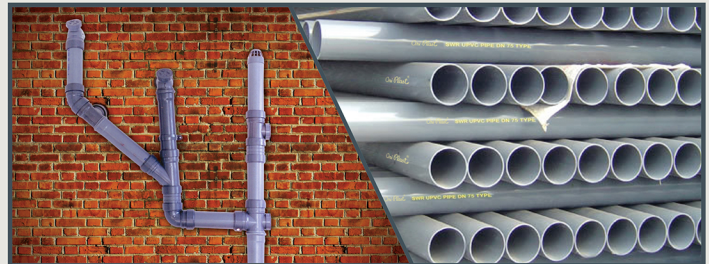

uPVC SWR DRAINAGE SYSTEMS

Application

Ori-Plast uPVC SWR pipes are used for drainage & sewerage purposes. The Ori-Plast SWR range is ideal for both residential and commercial premises of any height due to its superiority as compared to conventional systems such as Cast Iron. Ori-Plast SWR pipes and fittings are now available with Prefit PP rubber ring which is leak proof and easy to install.



SWR Pipes

Type	Description	Size(mm)	Length(mtr)	Color
A	Single Socketed & Double Socketed	75,90,110,160	0.6, 0.9, 1.2, 1.8, 3.0, 6.0	White & Grey
B	Single Socketed & Double Socketed	75,90,110,160	0.6, 0.9, 1.2, 1.8, 3.0, 6.0	White & Grey

SWR Fittings

Item Size - 75mm & 110mm

Slip Coupler, Short Bend 45°, Bend 87.5°, Door Bend 87.5°, Cleaning Pipe, Single 'Y', Single 'Y' with Door, Double 'Y', Double 'Y' with Door, Single 'T', Single 'T' with Door, Double 'T' & Double 'T' with Door, Vent Cowl, Pipe Clip, Socket Plug, Door Cap, Rubber Seal for Door, Nahani Trap with Jali, Ring Seal Adapter, Threading Bush Cap, Nahani Body, Nahani Pipe, Nahani Jali, Trap Body, 110x75mm, Reducer.

Item Size - 110mm

Multi Floor Trap, Multi Floor Trap with 3 X 50mm End Cap, Rubber Ring, Nahani Trap without Jali.

For better understanding please refer to our price list.

Benefits / Advantages

- Handling, Transportation, Installation and after sales service.
- Unaffected by chemicals and industrial waste.
- High Flow Rate throughout life due to its smooth internal surface.
- Prefit PP Ring provides sure leak proof joints.
- Corrosion resistant.
- All weather resistant, no effect of sunlight (UV).
- Aesthetic Superiority to CI and AC systems.
- Immune from rodent attacks.

Product range

USAGE- Soil, Waste, Rain and Drainage
JOINTING- Solvent Cement Joint & Rubber Ring (Prefit PP Ring)

Item Size - 90mm

Bend 87.5°, Door Bend 87.5° (Right & Left), Single 'T' & Single 'T' with Door (Right & Left).

Item Size - 75mm

Rubber Ring, Nahani Trap without Jali.

Other Fittings

Item

125mm Trap Body, P Trap, Q Trap & S Trap (125 x 100mm), P Trap, Q Trap & S Trap (110 x 110mm), Rubber Lubricant 500gm & 1 kg, 110 mm Multi Floor Trap bore & Trap Insert Plate, 50mm Block (for Multi Trap), Reducer 110mm X 75mm.